



FORMERLY HERITAGE® 30

HERITAGE® LAMINATED ASPHALT SHINGLES

PRODUCT DATA



MANUFACTURED IN FREDERICK, MD

HERITAGE® shingles feature a double-layer fiberglass mat construction with a random-cut sawtooth design. The two layers of mat are coated with asphalt and then laminated together and surfaced with mineral granules. A self-sealing strip of asphalt helps provide wind resistance.

USES

For application to roof decks with inclines of not less than 2 inches per foot. For slopes between 2 inches and 4 inches per foot, refer to application instructions.

ADVANTAGES

- 30-year Limited Warranty, 15-year FULL START, 5-year limited transferability.
- 15-year Limited Wind Warranty for winds up to 110 MPH**.
- Shadowtone feature adds depth and dimensional appearance.
- 10-year Algae Relief-Algae Cleaning Limited Warranty that provides for cleaning of discoloration caused by certain algae growth that may occur in areas with high humidity.
- Rustic beauty of wood shakes.

CERTIFICATIONS/REPORTS

Listed by UL for:
Class A Fire Rating
Wind Resistance
ASTM D 3462

Florida Building Code Approved

Tested in compliance with:
UL 790/ASTM E 108, Class A
ASTM D 3161, Type I, Class F (110 mph)
UL 2390/ASTM D 6381, Class H (150 mph)
ASTM D 7158, Class H (150 mph)
TAS 100-95 Wind and Wind Driven Rain
Miami-Dade County Florida NOA: 11-1228.01
Expiration Date: 03/21/17

COLORS

America's Natural Colors:

- Autumn Brown

- Natural Timber

- Thunderstorm Grey

Classic Heritage Colors:

- Aged Wood

- Rustic Black

- Slatetone Grey

- Desert Sand†

- Rustic Cedar

- Tile Red Blend†

- Grey Mist†

- Rustic Evergreen

- Virginia Slate

- Olde English Pewter

- Rustic Redwood

- Weathered Wood


- Oxford Grey

- Rustic Slate

†Available from our Riviera Beach, FL warehouse

PRODUCT DATA*

Shingle size 13-1/4" x 39-3/8"
 Exposure 5-5/8"
 Coverage per Sales Square 98.4 sq.ft.
 Shingles per Sales Square 64
 Bundles per Sales Square 3

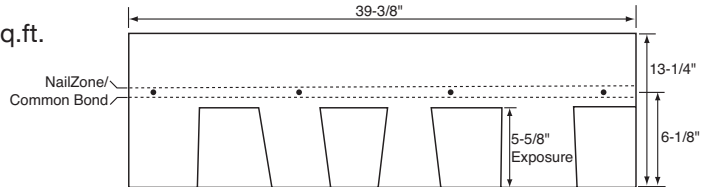

* All values stated as nominal

** 130 mph when applied in accordance with TAMKO's High Wind Application instructions.

CAUTION: This product contains crystalline silica and formaldehyde. Crystalline silica and formaldehyde have been classified as "known" human carcinogens by the International Agency for Research on Cancer (IARC) and the National Toxicology Program. This product also contains oxidized asphalt. Occupational exposures to oxidized asphalt and its emissions during roofing have been classified by IARC as a "probable human carcinogen". Oxidized asphalt also contains Polycyclic Aromatic Hydrocarbons some of which have been classified by IARC as known or probable human carcinogens. The physical nature of this product may help limit any inhalation or dermal hazard during application and/or removal. However, physical forces such as sawing, grinding or drilling during demolition work and heating or burning may increase the inhalation or dermal exposure hazard of this product. Take precautions to prevent breathing and contact with skin.



| | | | | |
|--------------------|----------------------|----------------|-------|--------------|
| Central District | 220 West 4th St. | Joplin, MO | 64801 | 800-641-4691 |
| Northeast District | 4500 Tamko Dr. | Frederick, MD | 21701 | 800-368-2055 |
| Southeast District | 2300 35th St. | Tuscaloosa, AL | 35401 | 800-228-2656 |
| Southwest District | 7910 S. Central Exp. | Dallas, TX | 75216 | 800-443-1834 |
| Western District | 5300 East 43rd Ave. | Denver, CO | 80216 | 800-530-8868 |

TAMKO Logo, Heritage®, and TAMKO® are registered trademarks, and the Heritage Roofer Logo is a trademark, of TAMKO® Building Products, Inc.

Information included in this product data sheet was current at time of printing. To obtain a copy of the most current version of this product data sheet, visit us online at tamko.com or call us at 800-641-4691.

For information regarding or a copy of TAMKO's Limited Warranty, contact your local TAMKO representative, visit us online at tamko.com, or call us at 800-641-4691.